


Snatch Blocks

with shackle

- **Material** : carbon steel, fitted with roller bearings, except for blocks under WLL 4 tons, these are equipped with phosphor bronze bushes
- **Safety factor** : MBL equals 4 x WLL
- **Finish** : painted blue
- **Certification** : blocks have been individually proof load tested
test certificates can be supplied upon request
- **Note** : Working Load Limit is on the headfitting

working load limit	diameter wire rope	diameter outside sheave	length	width	width outside	weight each
		a	b	c	d	
tonnes	mm	mm	mm	mm	mm	kg
2	7 - 9	75	230	57	80	4.0
4	10 - 12	114	330	80	121	5.3
8	16	152	483	125	159	14.0
8	20 - 22	152	483	125	159	15.0
8	20 - 22	203	533	125	210	20.0
12	20 - 22	254	686	127	264	36.0
15	24 - 26	254	702	127	264	30.0

- **Special Note** : This design of block is fitted with grease nipples in the head fitting and centre pin. It is important that these blocks are greased initially before first use and thereafter checked and greased daily.

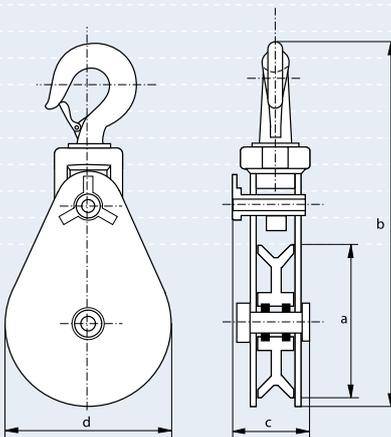

Snatch Blocks

with hook c/w safety catch

- **Material** : carbon steel, fitted with roller bearings, except for blocks under WLL 4 tons, these are equipped with phosphor bronze bushes
- **Safety factor** : MBL equals 4 x WLL
- **Finish** : painted blue
- **Certification** : blocks have been individually proof load tested
test certificates can be supplied upon request
- **Note** : Working Load Limit is on the headfitting

working load limit	diameter wire rope	diameter outside sheave	length	width	width outside	weight each
		a	b	c	d	
tonnes	mm	mm	mm	mm	mm	kg
2	7 - 9	75	230	57	80	4.0
4	10 - 12	114	330	80	121	5.3
8	16	152	483	125	159	14.0
8	20 - 22	152	483	125	159	15.0
8	20 - 22	203	533	125	210	20.0
12	20 - 22	254	686	127	264	36.0
15	24 - 26	254	702	127	264	30.0

- **Special Note** : This design of block is fitted with grease nipples in the head fitting and centre pin. It is important that these blocks are greased initially before first use and thereafter checked and greased daily.